


Zawór przeciążeniowo-hamujący 1/2 dwustronny 1-60L/min kołnierzowy

1	2	3	4	5
EHVCDF	*	*	*	*



			*
1	Valvola di bilanciamento doppio effetto centro aperto corpo in acciaio flangiata 40x48 Double counterbalance valve center open flanged steel body 40x48	EHVCDF	
2	Dimensione Size	1/4" GAS (BSPP)	01
		3/8" GAS (BSPP)	02
		1/2" GAS (BSPP)	03
3	Campo di taratura Setting range	Molla Spring 30/210 Bar	A
		Molla Spring 60/350 Bar	B
4	Materiale Material	Acciaio + Zincatura Steel + Zinc Plating	S
5	Rapporto di pilotaggio Pilot ratio	1:4,25 Standard	-
		1:8	8

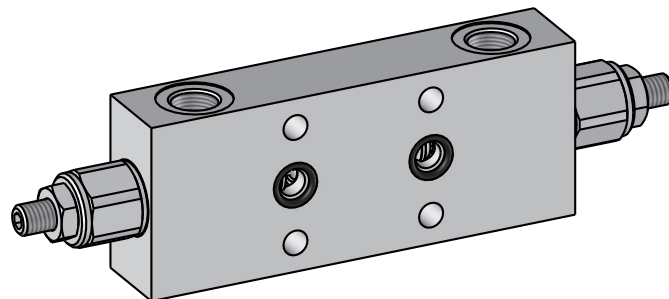

Caratteristiche Characteristics

Portata min/max Min/max flow-rate	l/min-GPM	1/60 - 0.26/15.9
Pressione di lavoro max Max working pressure	-	350 bar 5075 PSI
Pressione max di taratura Max setting pressure	-	350 bar 5075 PSI
Temperatura ambiente Room temperature	°C	-30 +50
Temperatura olio Oil temperature	°C	-30 +80
Filtraggio consigliato Recommended Filtration	micron	30

Diagramma Perdite Di Carico Pressure Drop Curves

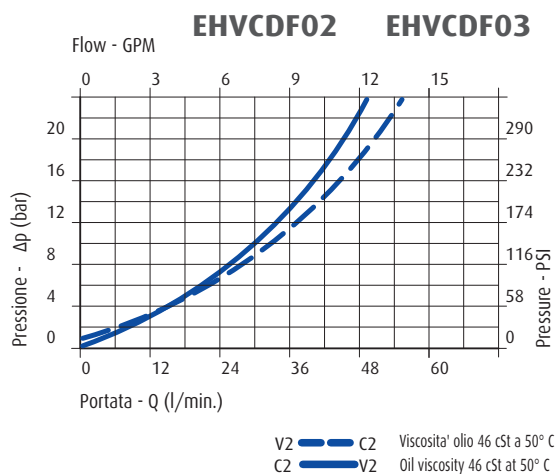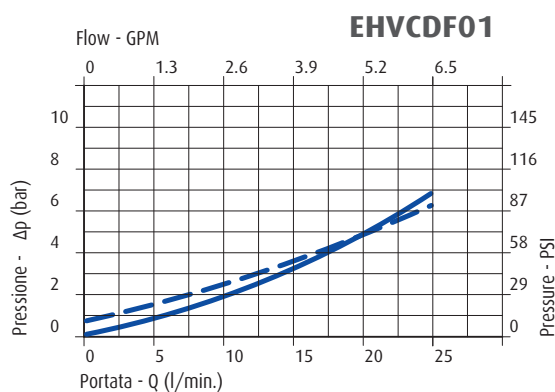

Schema idraulico Hydraulic circuit

